



3d Projector Android Lite

Project Life in Brilliant 3D



Thank you for purchasing this Merlin Product. Please read the instruction manual carefully before using the product.

The documentation provided will allow you to fully enjoy all the features this unit has to offer.

Please save this manual for future reference.

Instructions

- 1) Connect the provided adapter to the 'DC IN' port at the back of the projector.
- 2) Charge the projector for a couple hours before first use.
- 3) Place the projector on a flat, level surface and slide the 'Standby' button to the right. Then press the 'Power' button on the projector/remote to turn the projector on.
- 4) Adjust focus using the focus ring located on the right side of the device.
- 5) Connect your preferred display source. The projector has multiple display connectivity options (Mini VGA/AV, HDMI, USB, and microSD). Select the appropriate source from the Home screen.
- 6) To navigate through the home interface, use the 'Arrow' keys on the remote control. To select an item, press the 'OK' button. To go back through a menu, touch the 'Back' icon. And to go to the 'Home' screen, press the 'Home' button.
- 7) The projector is capable of connecting to Bluetooth devices and Wi-Fi networks. Go to the 'Settings' menu from the Home screen to access these settings.
- 8) You can install apps from Google Play store. Go to 'App Store' from the Home screen to access this.
- 9) The projector is capable of playing files from USB or microSD cards. Just insert your preferred medium in the appropriate slot at the back of the projector.
- 10) To access files on your connected USB drives or microSD cards, use the 'LocalMM' or 'ES Explorer' app from the Home screen.
- 11) You can also connect your headphones or any external speakers to the projector using the 'AUX' port at the back of the projector.
- 12) To mirror your iPhone or iPad's display, connect your iOS device and the projector to the same Wi-Fi network.

- 13) In the projector, open the 'AirPlay' app from the Home screen. Then go to 'Air Play' settings in your iOS device by dragging up the Control Centre.
- 14) Next, from the list of available devices, select your projector (Link-xxxx) and enable 'Mirroring'.
- 15) To mirror your Android device's display, connect both the projector and your Android device to the same Wi-Fi network.
- 16) In the projector, open the 'Miracast' app from the Home screen. Then go to your Android device's 'Screen Sharing' settings and connect to the projector (MCast_XXXX).
- 17) You should see a message on your projector requesting access from your Android device. Click on 'Accept' and your Android device's display should be mirrored to the projector.
- 18) Press the '3D' button on the remote during playback to switch between 3D, Default View, Left-Right View, and Up-Down View modes.
- 19) Press the 'Menu' button on the remote to access Picture settings.
- 20) To change projection settings, such as Auto/Manual Keystone Correction, Gyro Horizon, Mounting method, Digital Zoom, etc., go to the 'DLP Settings' menu from the Home screen.

Maintenance

- 1) Do not apply excessive force on the focus ring or when inserting cables.
- 2) Connect cables in the right direction.
- 3) Do not pour water or other liquids on the projector.
- 4) Use only the included adapter to power the device.


FAQ

- Q) The projector is not powering up.
A) Check if the power adapter is properly connected. Ensure that the 'Standby' button is slid to the right to the ON position. If you're using the projector's built-in battery, ensure that the projector has enough charge.
- Q) The display is not working.
A) Ensure that display cables are connected properly, and that the right source is selected.
- Q) The display isn't clear.
A) Adjust focus using the focus ring located on the right side of the projector.
- Q) 3D effect is not working.
A) Ensure that you've selected the correct 3D mode from the '3D' menu.
- Q) The projector is not responding.
A) Turn the projector off, disconnect the power cable, and reconnect after a couple of minutes.
- Q) I can't hear anything from the projector's built-in speaker.
A) Ensure that the device/source volume is not set to zero.



Specifications

Projection Technology : DLP
 CPU : Cortex A9 Quad-Core, 1.6GHz
 Operating System : Android 4.4.2
 Resolution : 1280x800, (Supports 1080p decoding)
 Connectivity : AV, VGA, microSD Card, HDMI, USB (supports USB Hard Disk Data Read), Wi-Fi, WLAN, Line Out

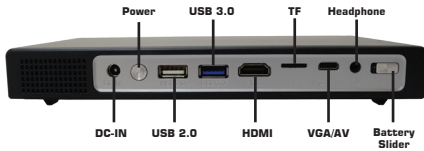

LIMITED WARRANTY

Merlin Products are covered by a limited one-year warranty policy. If the product suffers from a manufacturing defect, the customer will receive a replacement if claimed within 15 days of the purchase date. Otherwise, the product will be inspected for possible repair options. The product will either be repaired and returned free of charge, or replaced. All repair services past the one-year warranty period will be charged for any repairs that need to be made.

If the client is located outside the UAE, or is otherwise unable to personally deliver the defective product to our service center or retail outlets, he/she may send it via post at his/her own cost. The repaired/replaced product will then be returned to the client via courier mail at Merlin's cost, as long as the warranty period is still active.

Important: This limited warranty DOES NOT COVER normal wear and tear, accidents, damage during transit, misuse, abuse or neglect. Attempting to disassemble the unit will render the warranty null and void.

REGISTER NOW


We hope you enjoy the quality of Merlin Digital product. Please take out a few minutes to register your product at merlin-digital.com/register to avail:

- Special discounts and promotions on other Merlin products
- Exclusive information on new products and innovations
- Reminders about product firmware downloads, updates and upgrades
- Competitions and exciting giveaways

To learn more about Merlin products visit our site at: www-merlin-digital.com or like our Facebook page on facebook.com/merlin.digital.gadgets
 For enquiries and information call our toll free number **800-MERLIN** (Sat-Thu, 9 am - 6 pm)

Contact our support staff for troubleshooting and any other enquiries relating to your Merlin product by sending an email at support@merlin-digital.com and your issue will be resolved within 48 hours.

REGISTER
for exclusive product releases and future prize drawings!

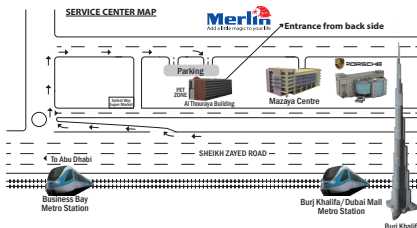

For a complete list of our worldwide locations, visit <http://merlin-digital.com/contacts>



٤- ثم من خلال قائمة الأجهزة المتاحة، قم باختيار جهاز البروجيكتور (Link-xxxx) وقم بتفعيل خاصية المحاكاة.

٥- لعمل تمرير ومحاكاة لجهاز الأندرويد، قم بتوصيل كلاً من الجهاز والبروجيكتور بنفس شبكة الواي فاي.

٦- من خلال البروجيكتور، قم بفتح تطبيق "Miracast" من القائمة الرئيسية. ثم قم بالذهاب إلى قائمة شاشة المشاركة لجهازك الأندرويد والاتصال بالبروجيكتور (MCast-xxxx).

٧- يجب أن تری رسالة على جهاز البروجيكتور تطلب منك السماح للدخول من جهاز أندرويد. قم بالضغط على موافق وسوف يقوم البروجيكتور بعرض صورة جهاز الأندرويد.

٨- قم بالضغط على زر "3D" المتواجد بالريموت كونترول أثناء التشغيل للتبديل ما بين عرض التري دي و العرض العادي، العرض من اليسار اليمين والعرض من اعلى لأسفل.

٩- قم بالضغط على زر القائمة من الريموت كونترول للدخول إلى إعدادات الصورة.

١٠- لتغيير إعدادات البروجيكتور، مثل ذاتي / يدوي، تصحيح المدخلات، التسارع والتقارب أو التقريب، إلخ، قم بالذهاب إلى قائمة إعدادات "DLP Settings" المتواجدة بالشاشة الرئيسية.

الصيانة:

١- لا تقم باستخدام القوة المفرطة عند تغيير بكرة ضبط التركيز للصورة أو إدخال الكابلات.

٢- قم بتوصيل الكابلات بالاتجاه الصحيح.

٣- لا تقم بسكب الماء أو السوائل الأخرى فوق الجهاز.

٤- قم باستخدام محول الطاقة فقط المخصص للجهاز.

الأسئلة الأكثر شيوعاً:

- الجهاز لا يستجيب للتشغيل؟

قم بفحص كابل الطاقة إذا ما كان متصل بطريقة صحيحة. تأكد من أن

الجهاز على وضع الاستعداد من خلال تحريك الزر إلى جهة اليمين لبدء التشغيل.

في حالة إذا ما كنت تستخدم البطارية المدمجة بالبروجيكتور، تأكد من أن البطارية بها طاقة كافية.

- العرض لا يعمل؟

تأكد من أن كابل التشغيل متصل بطريقة صحيحة، وأنها قمت باختيار مصدر التشغيل الصحيح.

- العرض غير واضح؟

قم بتعديل دقة العرض من خلال استخدام بكرة الضبط المتواجدة أعلى البروجيكتور.

بروشوت جيم بال

بروجيكتور جديد في سطوح ثلاثي الأبعاد



شكراً لك لشرائك منتجات ميرلين. الرجاء قراءة التعليمات قبل الاستخدام، فالوثائق المرفقة تسمّح لك بالتمتع الكامل بجميع مميزات هذا الجهاز. لذا يُرجى الإحتفاظ بكتيب التعليمات كمرجع في المستقبل.

التعليمات:

١- قم بتوصيل محول الطاقة في منفذ التوصيل المتواجد بالجهة الخلفية للبروجيكتور.

٢- قم بشحن البروجيكتور لمدة ساعتين قبل أول استخدام.

٣- قم بوضع البروجيكتور على سطح مستوي، وقم بتمرير زر الاستعداد إلى جهة اليمين. ثم قم بالضغط على زر الطاقة لجهاز البروجيكتور أو الريموت كونترول لبدء التشغيل.

٤- قم بضبط بكرة ضبط الصورة المتواجد بجهة اليمين للبروجيكتور.

٥- قم بتوصيل مصدر التشغيل الذي ترغب به بالبروجيكتور. البروجيكتور يحتوي على عدة خيارات للتوصيل (ميني في جي ايه / ايه في، اتش دي إم آي، يو اس بي، مايكرو اس دي). قم باختيار مصدر التشغيل المناسب من القائمة الرئيسية.

٦- للتصفح خلال الواجهة الرئيسية، قم باستخدام أزرار الأسهم المتواجدة بالريموت كونترول. لاختيار أي عنصر، قم بالضغط على زر موافق. للرجوع من القائمة الرئيسية، قم بلمسة أيقونة الرجوع والرجوع إلى الشاشة الرئيسية من خلال الضغط على الشاشة الرئيسية.

٧- البروجيكتور قادر على الاتصال بالأجهزة الأخرى عبر البلوتوث وشبكة الواي فاي. قم بالذهاب إلى قائمة الإعدادات من الشاشة الرئيسية للدخول إلى هذه الإعدادات.

٨- يمكنك تثبيت التطبيقات من متجر جوجل. قم بالذهاب إلى "App Store" من الشاشة الرئيسية للدخول إلى هذا التطبيق.

٩- البروجيكتور قادر على تشغيل الملفات من مشغل الفلاشات اليو اس بي، أو من خلال كروت الذاكرة اس دي كارذ. فقط قم بإدخال مشغل البيانات المفضل لديك بمنفذ التوصيل المناسب بالجهة الخلفية للبروجيكتور.

١٠- للدخول إلى الملفات المخزنة على فلاشة اليو اس بي أو كارت الذاكرة، قم باستخدام تطبيق "LocalMM" أو "ES Explorer" من الشاشة الرئيسية.

١١- يمكنك أيضاً توصيل سماعات الأذن أو مكبرات الصوت الخارجية بجهاز البروجيكتور عبر منفذ التوصيل AUX المتواجد بالجهة الخلفية للبروجيكتور.

١٢- لعمل تمرير لهاتف الأيفون أو الأيباد، قم بتوصيل الجهاز بالبروجيكتور عبر نفس شبكة الواي فاي.

١٣- من خلال البروجيكتور، قم بفتح تطبيق "AirPlay" من القائمة الرئيسية. ثم قم بالذهاب إلى إعدادات "AirPlay" المتواجدة في هاتفك الأيفون من خلال سحب مركز التحكم لأسفل.



الضمان

ضمان محدود

المواصفات:

تكنولوجيا التصنيع: DLP


معالج البيانات: كورتكس ايه 9 رباعي النواة بسرعة 1.6 جيجا هيرتز.

نظام التشغيل: أندرويد 4.4.2

الأبعاد: 800×1280 (يدعم 1080 بكسل).

التوصيل: ايه في، في جي ايه، مايكرو اس دي كارد، اتش دي إم آي، يو اس بي

(يدعم قراءة الهارد ديسك عبر البر اس بي) واي آي، وي لان، ولاين أوت.

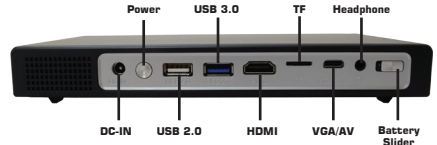

- تغطي مرلين ديجيتال منتجاتها عن طريق سياسة الضمان المحدود لمدة عام واحد فقط. إذا كان المنتج يعاني من عيب التصنيع سيحصل العميل على إستبدال للمنتج في غضون 15 يوماً من تاريخ الشراء وإلا سيتم إرسال المنتج لإجراء عملية الصيانة اللازمة. وعادةً تكون صيانة أو إستبدال المنتج في حالة إذا كانت فترة الضمان لا تزال سارية. وسيقوم العميل بدفع الرسوم على جميع خدمات الصيانة التي تقوم بإجرائها بعد إنتهاء فترة الضمان.
- إذا كان العميل متواجداً خارج دولة الإمارات العربية أو لا يستطيع تسليم المنتج شخصياً إلى محلات التجزئة لإرساله إلى الصيانة. فيمكنه إرساله من خلال البريد السريع على حسابه الشخصي بعد ذلك سيتم إرسال المنتج سواء تم إستبداله أو تمت صيانتة إلى العميل عبر البريد السريع وتتحمل الشركة تكلفة الشحن إذا كان المنتج لا يزال في فترة الضمان.

هام جداً:

هذا الضمان لا يشمل الحوادث، أو الأضرار الناتجة عن التنقل، أو سوء الاستخدام والعاملية، أو الإهمال ومحاولة تفكيك المنتج. أو إرساله إلى الصيانة في مكان آخر غير شركة مرلين. وفي حال حدوث ذلك يعتبر الضمان لاغياً.

الرجاء التسجيل

www.merlin-digital.com/register

نأمل أن تستمتع بجودة هذا المنتج من مرلين ديجيتال

يرجى تسجيل المنتج الخاص بك على الرابط التالي:

- تخفيضات وعروض خاصة على منتجات مرلين الأخرى
- معلومات حصرياً على المنتجات الجديدة والابتكرة
- التنبيه بتحميل وترقية برامج المنتجات
- مسابقات مثيرة

أو قم بزيارة صفحتنا على الفيس بوك

www.facebook.com/merlin.digital.gadgets

تعرفه المزيد عن منتجات مرلين الرجاء زيارة موقعنا الرسمي

www.merlin-digital.com

- يمكنك الإتصال بفريق الدعم الخاص بنا لحل المشاكل أو الرجاء إرسال بريد إلكتروني وسيتم حل مشكلتك في غضون 48 ساعة

- ولزيد من المعلومات الرجاء الإتصال على الرقم المجاني من السبت للخميس (من الساعة 9 صباحاً حتى الساعة 1 مساءً) 800 مرلين (137541)

للحصول على باقي المواقع في أنحاء العالم، الرجاء زيارة موقعنا:

<http://merlin-digital.com/contacts>

